

Tunnel Tape

► Product Description


Tunnel Tape has adhesive only on the outer zone edges to create a tunnel to protect cords, cables and wires from the adhesive material.

► TECHNICAL DATA

backing	: PE coated cloth
adhesive-base	: Natural rubber
total thickness (mm)	: 0.3
peel adhesion (kg/25mm)	: 1.0
rewinding force (kg/50mm)	: 2
tensile strength (kg/25mm)	: 13 (ADHESIVE PART)
	: 16 (NON ADHESIVE PART)
holding power (25mm x 25mm / 40℃)	: 20min
ball tack (cm / ball no. 20)	: 10
heat resistance (℃)	: 40
application temperature	: 5 ~ 35
storage life (20℃ / 60%)	: 6 months

The used test methods are based on acceptable specifications like PSTC or internal test methods which are required on request.

► PRODUCT DESIGN

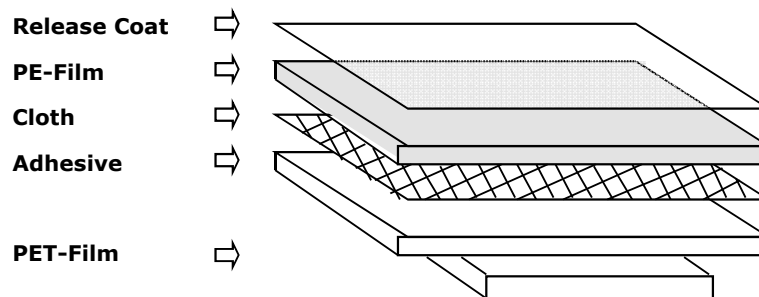

REMARK :

All the technical data are average values. We advice to test the material required to ensure the suitability of intended application. The company reserves the right to improve products and change specifications which may alter performance.

KB ADHESIVES CO., LTD.

TEL : +82-2-905-7864 FAX : +82-2-905-7867

www.kbgroupkorea.com info@kbgroupkorea.com

Overseas division : Rm. 604, Nene Bldg., 16-1, Chang 4 Dong, Dobong-gu, Seoul, Korea

Factory : 630, Janggye-ri, Hwaseong-myeon, Cheongyang-gun, Chungcheongnam-do, Korea

LIMITED WARRANTY STATEMENT :

Products are warranted to be free of defects in workmanship and material at time of shipment. KB Adhesives Korea Ltd. will replace or credit any material we determine to be defective. Before using, user shall determine the suitability of the product for itsintended use, and user assumes all risk and liability whatsoever in connection therewith.