

KB ADHESIVES CO., LTD.



KB Adhesives Korea

Office : Rm. 402, Nene Bldg., 391 Nohae-ro, Dobong-gu, Seoul, Korea

Tel : +82 2 905 7866 Fax : +82 2 905 7867 www.kbadhesves.com

Factory : 32-12, Geumgyedong-gil, Hwaseong-myeon, Cheongyang-gun, Chungcheongnam-do, Korea

POM300S

* CONSTRUCTION



Modified Solvent base Acrylic Adhesive

Polyethylene foam

Polyester film

Modified Solvent base Acrylic Adhesive

White PE paper release liner

Discription


- * soft
- * comfortable
- * high shear strength
- * strong ultrimate bonding
- * low and high service temperature ability
- * excellent water proof

* Technical Characteristics

Test Standard	China GB	ASTM	FINAT	JIS
Tape Thickness , mm	0.3			
Colour	Black			
Adhesion	20N/25mm	20N/25mm	20N/25mm	20N/25mm
Initial Tack	16# (ball)	3cm	16N/25mm	16# (ball)
Holding Power	>200 hours	>200 hours	>200 hours	>200 hours

* Applications

Used for long-terms bonding trims and profiles, gasket lamination, especially for mobile, camera water proof seal.

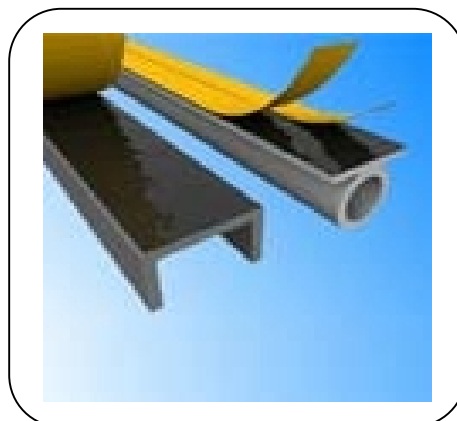

*** Temperatures**

Application (Minimum): 10°C

Service (long term): -30°C to 100°C

Short term: 120°C

*** Standard Size**

	Tape Width	Usable Width	Length
Jumbo rolls	1070mm	1040mm	200-100m
Log rolls	1070mm	1040mm	20m
Cut roll	25, 48, 50mm		50m
Big slit roll	12, 18....mm		Max 200m
Spool roll	No offer		

*****Available in other sizes as well.*****

*** Surface Preparation**

It is essential, as with all pressure sensitive tapes, that the surface to which the tape is applied be clean, dry and free of grease and oil

*** Storage And Shelf Life**

The shelf life of the products is one years when stored at 18-25°C, 30-70% relative humidity and out of direct sunlight, in good packaging.